

# EVOIVE

ceiling fans

PLUS

## PRODUCT SPECIFICATION SHEET



FLUSH MOUNT VIEW

<b>Model</b>	2501
<b>Color</b>	Bamboo
<b>Location</b>	Rated for Indoor & Outdoor Damp <sup>1</sup>
<b>Fan diameter</b>	132 cm / 52 inches
<b>Blades</b>	(3) ABS plastic
<b>Coverage area</b>	Space +37m <sup>2</sup>
<b>Input Voltage</b>	100-120v and 220v-240 VAC, 1 phase, 50-60Hz
<b>Motor</b>	DC. Reversible. 6 speeds
<b>Control</b>	Handheld Remote control
<b>Reverse flow</b>	Winter & Summer mode

<b>Light kit</b>	Integrated (20W) 2100 lumen. 3 colors temperatures: 3000K, 4000K, 6500K
<b>Hanging system</b>	Universal 12.5cm (5") and 25cm (10") And Flush Mount
<b>Airflow (Max)</b>	7,950CFM. 225.11 m <sup>3</sup> /min
<b>Speed (Max)</b>	180 RPM
<b>Sound Level<sup>2</sup></b>	<40 dba at max speed
<b>Power (W)</b>	40W
<b>Warranty:</b>	10-Years motor. 2-Years LED light

<sup>1</sup>Outdoor Damp: Areas that are not directly exposed to sun, rain, snow, water, or moisture.

<sup>2</sup>Sound level: Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions



# EVOIVE

ceiling fans

PLUS

## ESPECIFICACIONES DEL PRODUCTO



CON BARRA FIJA

**Modelo** 2501

**Color** Bambú

**Ubicación** Interior & exterior<sup>1</sup>. Patio cubierto

**Diámetro** 132 cm / 52 pulgadas

**Aspas** (3) ABS plástico

**Área impacto** Área / espacio +37m<sup>2</sup>

**Voltaje** 100-120v y 220v-240 VAC,  
1 phase, 50-60Hz

**Motor** DC. Reversible. 6 velocidades

**Control** Mando a distancia

**Dirección** Modo verano e invierno

**Luz**

Integrada. (20W) 2100 lumen.  
3 colores de temperatura: 3000K, 4000K, 6500K

**Sistema para colgar**

Universal 12.5cm (5") and 25cm (10")  
Y Barra fija

**Flujo Aire (Max)**

7,950CFM. 225.11 m<sup>3</sup>/min

**Velocidad (Max)**

180 RPM

**Nivel sonoro<sup>2</sup>:**

<40 dba max velocidad

**Potencia (W)**

40W

**Garantía:**

10 años motor. 2 años luz

<sup>1</sup> Exterior: Zonas que no están expuestas directamente al sol, la lluvia, la nieve, el agua o la humedad.



<sup>2</sup> Nivel sonoro: Los resultados reales de las mediciones de sonido sobre el terreno pueden variar debido a las superficies reflectantes del sonido y a las condiciones ambientales.



# EVOIVE

ceiling fans


## Dimensions / Dimensiones

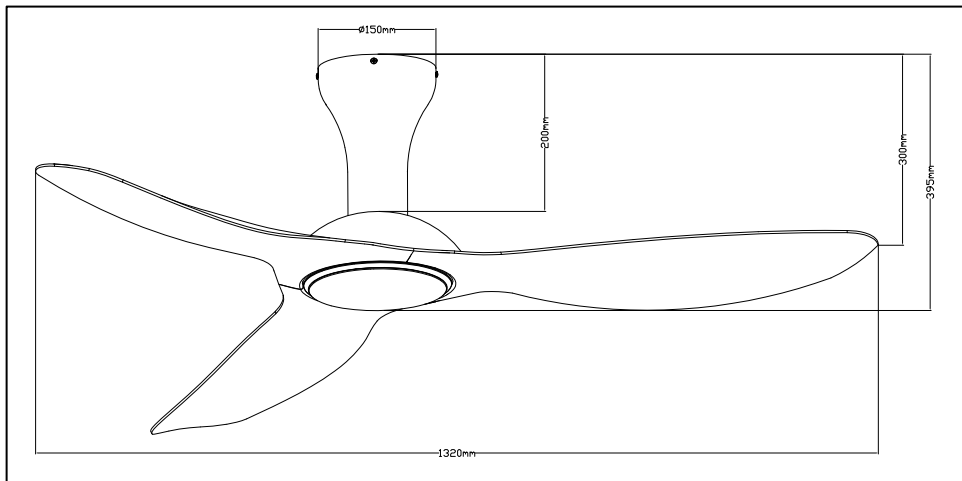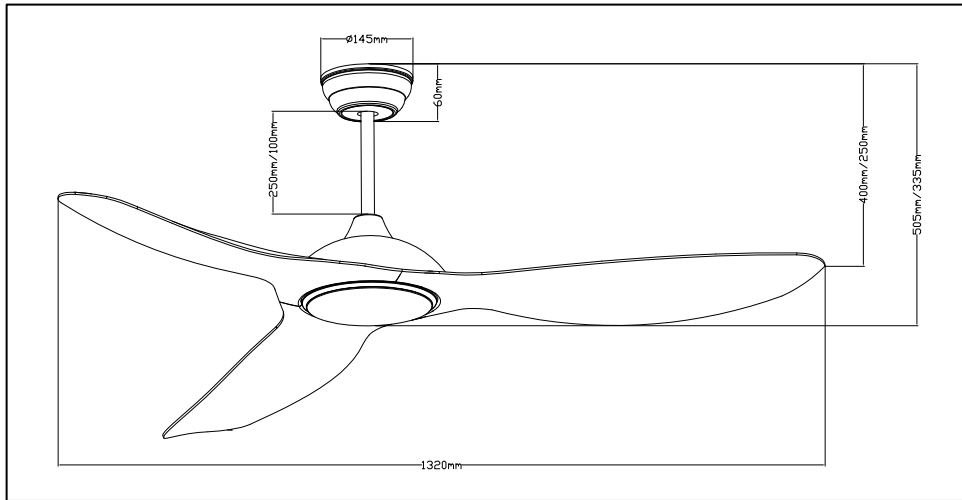

# EVOLVE

## ceiling fans

### TECHNICAL DATA

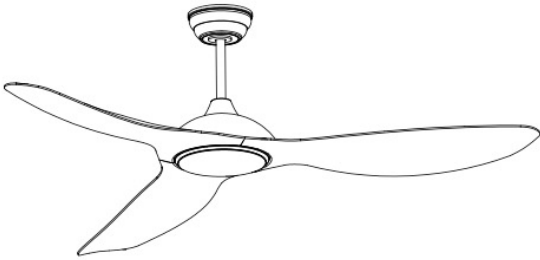

<b>Diameter / Diámetro</b>	132cm / 52 inches
<b>Motor</b>	Reversible. DC motor. 6-speed / velocidades.
<b>Location / ubicación</b>	Indoor-Outdoor covered patio. Interior-Exterior patio cubierto. IPX2
<b>Material Blades / Aspas</b>	ABS. Plastic / Plástico
<b>Control</b>	Remote control / Mando a distancia Wall control / control de pared
<b>Universal downrod Barra extensible</b>	40   60   90   120 cm 15   23   35   47 inches
<b>Warranty / Garantía (years/años)</b>	10-Motor. 2-LED Light/Luz.
<b>Input Voltage /</b>	100-240 VAC, 50-60Hz

Speed	Power (W)	Amps	RPM	Airflow (CFM)	Airflow (m <sup>3</sup> /min)	Operating Voltage	Sound Level*
#1	3.6	0.067	89	1590	44.52	100-120 VAC & 220V-240 VAC 1 phase 50-60Hz	<40 dba at max speed
#2	5.9	0.078	109	2385	66.78		
#3	9.6	0.099	127	3975	111.30		
#4	13.4	0.126	146	5962	166.95		
#5	20.2	0.164	166	6757	189.21		
#6	27.9	0.212	180	7950	222.6		

\*Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions

Evolve ceiling fan tested 132cm / 52". Fan tested input voltage at 100 – 240v ~ 50/60Hz. Average results provided.

Tested with: Universal 25cm downrod mount. DC Motor size 153\*20. Receiver / remote control.

Product Gross Weight: 7.4 kgs (16.3lbs). Product Net Weight: 6.4 kgs (14.1lbs).

LED Light Source: Max 20W – CTT: 3000K / 4000K / 6500K

