

EVOIVE

ceiling fans

PRODUCT SPECIFICATION SHEET



Model 2412

Color Dark Wood - Cocoa

Location Rated for Indoor & Outdoor Damp¹

Fan diameter 132 cm / 52 inches

Blades (3) ABS plastic

Coverage area Space +37m²

Input Voltage 100-120v and 220v-240 VAC,
1 phase, 50-60Hz

Motor DC. Reversible. 6 speeds

Control Handheld Remote control
Optional wall control

Reverse flow Winter & Summer mode

Light No light included

Hanging system Universal 12.5cm (5") and 25cm (10")

Airflow (Max) 6,800 CFM. 192.55 m³/min

Speed (Max) 207 RPM

Sound Level² <40 dba at max speed

Power (W) 38W

Warranty: 10-Years motor.

¹Outdoor Damp: Areas that are not directly exposed to sun, rain, snow, water, or moisture

²Sound level: Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions



EVOIVE

ceiling fans

ESPECIFICACIONES DEL PRODUCTO



Modelo 2412

Color Madera oscura - Cacao

Ubicación Interior & exterior¹. Patio cubierto

Díámetro 132 cm / 52 pulgadas

Aspas (3) ABS plástico

Área impacto Área / espacio +37m²

Voltaje 100-120v y 220v-240 VAC,
1 phase, 50-60Hz

Motor DC. Reversible. 6 velocidades

Control Mando a distancia
Control de pared opcional

Dirección Modo verano e invierno

Luz Luz no incluida

Sistema para colgar Universal 12.5cm (5") and 25cm (10")

Flujo Aire (Max) 6,800 CFM. 192.55 m³/min

Velocidad (Max) 207 RPM

Nivel sonoro²: <40 dba max velocidad

Potencia (W) 38W

Garantía: 10 años motor.

¹ Exterior: Zonas que no están expuestas directamente al sol, la lluvia, la nieve, el agua o la humedad.


² Nivel sonoro: Los resultados reales de las mediciones de sonido sobre el terreno pueden variar debido a las superficies reflectantes del sonido y a las condiciones ambientales.



EVOIVE

ceiling fans


Dimensions / Dimensiones

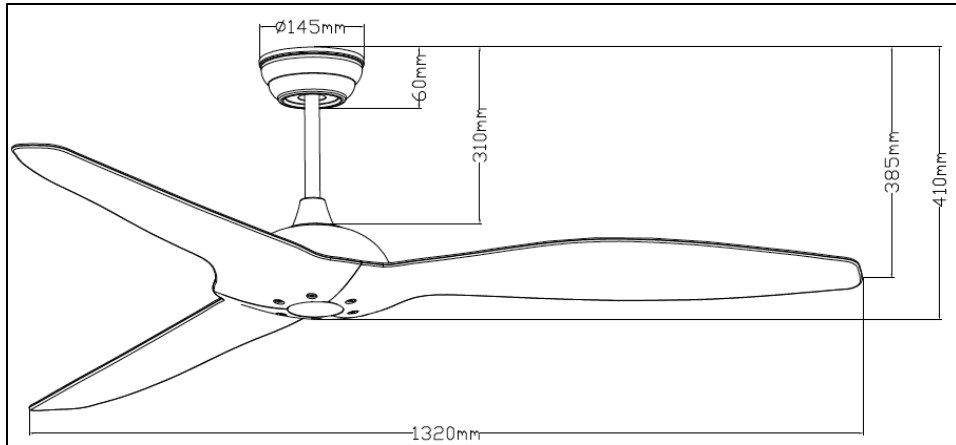

EVOLVE

ceiling fans

TECHNICAL DATA

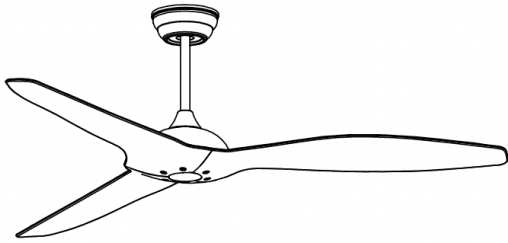

Diameter / Diametro	132cm / 52 inches
Motor	Reversible. DC motor. 6-speed / velocidades.
Location / ubicación	Indoor-Outdoor covered patio. Interior-Exterior patio cubierto. IPX2
Material Blades / Aspas	ABS. Plastic / Plástico
Control	Remote control / Mando a distancia Wall control / control de pared
Universal downrod Barra extensible	40 60 90 120 cm 15 23 35 47 inches
Warranty / Garantía (years/años)	10-Motor. 2-LED Light/Luz.
Input Voltage /	100-240 VAC, 50-60Hz

Speed	Power (W)	Amps	RPM	Airflow (CFM)	Airflow (m ³ /min)	Operating Voltage	Sound Level*
#1	7.9	0.069	126	1,360	38.08	100-240 VAC 1 phase 50-60Hz	<40 dba at max speed
#2	11	0.092	144	2,040	57.12		
#3	15.8	0.126	169	3,400	95.20		
#4	21.5	0.165	187	5,100	142.80		
#5	29.9	0.221	210	5,780	161.84		
#6	38.7	0.279	226	6,800	190.40		

*Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions

Evolve ceiling fan tested 132cm / 52". Fan tested input voltage at 100 – 240v ~ 50/60Hz. Average results provided.
Tested with: Universal 25cm downrod mount. DC Motor size 153*12. Receiver / remote control.
Product Gross Weight: 7.4 kgs (16.3lbs). Product Net Weight: 6.4 kgs (14.1lbs).

